



10/532102
Rec'd PCT/PTO 20 APR 2005
PCT/GB 2003 / 004737



G B 03 / 0 4 7 3 7 INVESTOR IN PEOPLE

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

REC'D 04 DEC 2003

WIPO PCT


I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

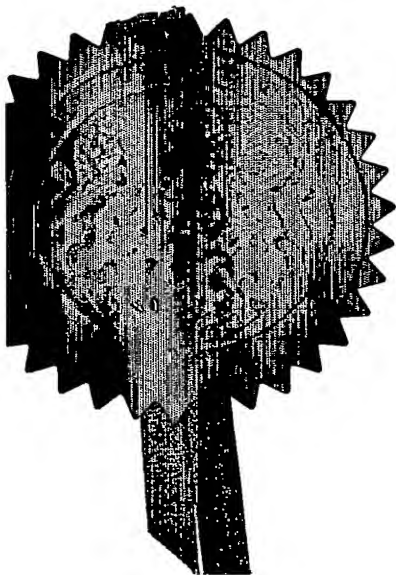

Signed

Stephen Hordley

Dated 26 November 2003

An Executive Agency of the Department of Trade and Industry

BEST AVAILABLE COPY

Patents Form 1/77

THE PATENT OFFICE

Patents Act 1977
(Rule 16)

- 1 NOV 2002

The
Patent
Office01NOV02 E760433-1 663975
P01/7705 0.00-0225495.1**Request for grant of a patent***(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)*

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

27

1. Your reference **02.098-lpw/ph**
2. Patent application number
(The Patent Office will fill in this part) **0225495.1**
3. Full name, address and postcode of the or of each applicant *(underline all surnames)* **IPWireless, Inc.
1001 Bayhill Drive, 2nd Floor
San Bruno, California
CA 94066**
- Patents ADP number *(if you know it)* **8169 401002**
- If the applicant is a corporate body, give the country/state of its incorporation **USA, Delaware**
4. Title of the invention **ARRANGEMENT AND METHOD FOR SEQUENCE
PRODUCTION IN A SPREAD SPECTRUM
COMMUNICATION SYSTEM**
5. Name of your agent *(if you have one)* **Peter Hudson**
- *Address for service* in the United Kingdom to which all correspondence should be sent *(including the postcode)* **InetIP
121 Blackberry Lane
Four Marks, Aiton
Hampshire GU34 5DJ**
- Patents ADP number *(if you know it)* **7987431001**
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and *(if you know it)* the or each application number
- | Country | Priority application number
<i>(if you know it)</i> | Date of filing
<i>(day / month / year)</i> |
|---------|--|---|
| | | |
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application
- | Number of earlier application | Date of filing
<i>(day / month / year)</i> |
|-------------------------------|---|
| | |
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? *(Answer 'Yes' if:*
a) *any applicant named in part 3 is not an inventor, or*
b) *there is an inventor who is not named as an applicant, or*
c) *any named applicant is a corporate body.*
See note (d)) **Yes**

Patents Form 1/77

0051627-01-NOV-02 06:38

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

15

Claim(s)

6

Abstract

1

Drawing(s)

4

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

3

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Date

Peter S. Hudson 1 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Peter Hudson

01420 562568

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

0051627 01 Nov 02 06:38

DUPLICATE

02.098-ipw

- 1 -

ARRANGEMENT AND METHOD FOR SEQUENCE PRODUCTION IN A
SPREAD SPECTRUM COMMUNICATION SYSTEM

5 **Field of the Invention**

This invention relates to spread spectrum communication systems, and particularly (though not exclusively) to direct sequence (DS) spread spectrum wireless
10 communication systems.

Background of the Invention

15 In DS spread spectrum communications such as in code division multiple access (CDMA) systems, a signal for transmission is spread in the frequency domain. Thus the same information is transmitted over a different (larger) bandwidth, affording some level of diversity in the
20 frequency domain. The benefits of such a communications method are that the transmitted signal is more resilient to band limited interference and frequency selective fading.

25 The spreading of a signal is achieved by modulating each symbol, or each set of consecutive symbols, of the transmission signal by a sequence or code that varies at a faster rate than that of the transmission signal. Typically in DS-CDMA systems the spreading waveforms are
30 selected from a long pseudo random sequence, or if short enough they can be chosen according to some optimality

02.098-1pw

- 2 -

criteria. Whilst longer sequences are desirable due to their superior correlation properties, shorter sequences are typically employed due to the resulting ease of implementation of both transmitter and receiver algorithms and associated hardware. As an example of a method for the design of short sequences, but not restricted to this method, the sequences may be chosen such that they exhibit good auto-correlation properties or such that pairs of sequences exhibit favourable cross-correlation properties. This typically requires a search over all possible sequences of the desired length to select the sequences with the desired attributes. For each new spreading length required, a new search is required for sequences that satisfy the desired optimality criteria.

However, this approach has the disadvantage(s) that, since good spreading waveform sequences require a search over all possible sequences of a desired length to select the sequences with the desired attributes, and since for each new spreading length required a new search is required for sequences that satisfy the desired optimality criteria, longer sequence lengths are inefficient to design.

25

A need therefore exists for efficient spread spectrum code construction wherein the abovementioned disadvantage(s) may be alleviated.

02.098-ipw

- 3 -

Statement of Invention

In accordance with a first aspect of the present invention there is provided an arrangement, for producing
5 a sequence of a predetermined length in a spread spectrum communication system, as claimed in claim 1.

In accordance with a second aspect of the present invention there is provided a method, of producing a
10 sequence of a predetermined length in a spread spectrum communication system, as claimed in claim 12.

The invention allows efficient generation of longer sequences from shorter ones. This has the advantage of
15 alleviating the need for an extensive search of sequences of the desired length and allows the simple re-use of existing hardware. The invention is suitable for any purposes where a set of sequences are used to derive a set of extended sequences with longer duration than the
20 original sequences. The invention is applicable to TD-CDMA systems, and in particular the various chip rates of the TDD mode of UTRA. The reader will appreciate that this method is applicable to, but not restricted to, generating extended length spreading sequences,
25 scrambling sequences and channel estimation sequences or midambles.

02.098-ipw

- 4 -

Brief Description of the Drawing(s)

Two efficient CDMA code construction schemes incorporating the present invention will now be described, by way of example only, with reference to the accompanying drawings, in which:

FIG. 1 shows a block schematic diagram illustrating a 3GPP UTRA radio communication system in which the present invention may be used;

FIG. 2 shows a schematic diagram illustrating spreading of data symbols in direct sequence spread spectrum; and

FIG. 3 shows a block schematic diagram illustrating an arrangement for concatenation of scrambling codes in UTRA TDD mode incorporating the present invention; and

FIG. 4 shows a block schematic diagram illustrating generation of an extended training code (such as a midamble) by concatenation of shorter training codes.

Description of Preferred Embodiments

Referring firstly to FIG. 1, a typical, standard UMTS Radio Access Network (UTRAN) system 100 is conveniently considered as comprising: a terminal/user equipment

02.098-1pw

- 5 -

domain 110; a UMTS Terrestrial Radio Access Network domain 120; and an infrastructure domain 130.

In the terminal/user equipment domain 110, terminal
5 equipment (TE) 110A is connected to user mobile equipment
(ME) 110B via the wired or wireless R interface. The ME
110B is also connected to a user service identity module
(USIM) 110C; the ME 110B and the USIM 110C together are
considered as a user equipment (UE) 110D. The UE 110D
10 communicates data with a Node B (base station) 120A in
the radio access network domain (120) via the wireless Uu
interface. Within the network radio access network
domain 120, the Node B 120A communicates with a radio
network controller (RNC) 120B via the Iub interface. The
15 RNC 120B communicates with other RNC's (not shown) via
the Iur interface. The Node B 120A and the RNC 120B
together form the UTRAN 120C. The RNC 120B communicates
with a serving GPRS service node (SGSN) 130A in the core
network domain 130 via the Iu interface. Within the core
20 network domain 130, the SGSN 130A communicates with a
gateway GPRS support node 130B via the Gn interface; the
SGSN 130A and the GGSN 130B communicate with a home
location register (HLR) server 130C via the Gr interface
and the Gc interface respectively. The GGSN 130B
25 communicates with public data network 130D via the Gi
interface.

Thus, the elements RNC 120B, SGSN 130A and GGSN 130B are
conventionally provided as discrete and separate units
30 (on their own respective software/hardware platforms)

02.098-1pw

- 6 -

divided across the radio access network domain (120) and the core network domain (130), as shown in FIG. 1.

The RNC 120B is the UTRAN element responsible for the control and allocation of resources for numerous Node B's 120A; typically 50 to 100 Node B's may be controlled by one RNC. The RNC also provides reliable delivery of user traffic over the air interfaces. RNC's communicate with each other (via the Iur interface) to support handover.

10

The SGSN 130A is the UMTS Core Network element responsible for Session Control and interface to the HLR. The SGSN keeps track of the location of an individual UE and performs security functions and access control. The SGSN is a large centralised controller for many RNCs.

15

The GGSN 130B is the UMTS Core Network element responsible for concentrating and tunnelling user data within the core packet network to the ultimate destination (e.g., internet service provider - ISP).

20

Such a UTRAN system and its operation are described more fully in the 3rd Generation Partnership Project technical specification document 3GPP TS 23.060, and related documents, available from the 3GPP website at www.3gpp.org, and need not be described herein in more detail.

25

In time division code division multiple access (TD-CDMA) systems, such as the time division duplex (TDD) mode of UMTS Terrestrial Radio Access (UTRA), the spreading

30

02.098-ipw

- 7 -

waveforms can be thought of as a combination of channelisation codes and scrambling codes and are typically short and periodic, such that each symbol or set of consecutive symbols is modulated by the same spreading waveform. For example, in FIG. 2 the data symbols are grouped into pairs and modulated by a spreading sequence of duration 8 chips in order to form the output sequence (it should be noted that the symbol and spreading sequences are not restricted to have values from the set $\{-1, +1\}$). FIG. 2A shows a waveform of data symbols; FIG. 2B shows a waveform of the spreading sequence; and FIG. 2C shows a waveform of spread symbols resulting from spreading of the data symbols of FIG. 2A by the spreading sequence of FIG. 2B. The choice of short and periodic spreading sequences in this case is principally due to the implementation advantages gained in the receiver. For instance, many multi-user or joint detection algorithms and or adaptive filter implementations are sensitive to the length and/or periodicity of the spreading sequences.

More specifically, in the high chip rate (3.84 mega chips per second) mode of UTRA TDD the scrambling code is a sequence of length 16 chips selected from a list of 128 possible sequences according to the initial cell parameter assignment and the current system frame number. In frames with an even system frame number, the scrambling code is equal to the initial cell parameter assignment. In frames with an odd system frame number, the scrambling code is selected as the initial cell parameter assignment plus 1 if the initial cell parameter

02.098-ipw

- 8 -

assignment is even and as the initial cell parameter assignment minus 1 if the initial cell parameter assignment is odd. The scrambling code may span either 1, 2, 4, 8 or 16 symbols depending upon the channelisation
5 code employed. Thus in this system the spreading code can be viewed as composite of the channelisation code and the scrambling code.

10 The spreading of signals in a 3GPP TDD system is described in detail in the 3GPP technical specification document 3GPP TS 25.223, 'Spreading and Modulation (TDD)', available from the 3GPP website at www.3gpp.org, and need not be described herein in more detail.

15 As will be described in more detail below, the present invention is based on a flexible approach (alternative to the prior art approach described above) for the generation of longer sequences from short ones by concatenating two or more short sequences according to
20 the desired length of the new sequences. Whilst the new extended sequences may not necessarily be optimal with respect to any of the usual criteria such as auto- or cross-correlation properties they have the distinct advantage that they re-use an existing set of sequences
25 that can be extended for other applications. The method's simplicity alleviates the need for a new and exhaustive search for sequences of the desired length and allows the re-use of existing hardware for the new application, i.e., instead of storing or implementing
30 hardware/software for the generation of the new sequences, a simple algorithm may be implemented that

02.098-ipw

- 9 -

uses the existing hardware/software for the generation of short sequences.

The number of short sequences used in the concatenation is dependent upon the desired length of the new sequences. The choice of sequences for concatenation may be flexible and may be chosen according to a simple set of design rules. For instance, if a set of N short sequences exists, each time a longer sequence is required an initial index into N of n is selected (according to some rules). Then according to the desired length of the new sequences concatenation may, for example, be produced from: short sequence n and $n+1$ (for a doubling of sequence length), or $n, n+1, n+2$ (for a tripling of sequence length) and $n, n+1, n+2, n+3$ for a quadrupling of sequence length. If at any point the index $n+x$ (for some x) exceeds the number of short sequences N the index may be wrapped round to the beginning of the list of short codes; thus $(n+x) \text{ modulo } N$ is used as the index into the list of short sequences where the index into the list of short sequences runs from 0 to $N-1$.

It may of course be understood that in choosing the short sequences for concatenation it is not necessary for the index to be incremented by 1 each time. It may in fact be incremented by any integer, including 0. For instance, in doubling the sequence length short codes n and $n+y$ (where $y \geq 1$) may be concatenated. Thus, for the tripling of the sequence length short sequences $n, n+y, n+2y$ may be concatenated, and for the quadrupling of the

02.098-ipw

- 10 -

sequence length short sequences n , $n+y$, $n+2y$, $n+3y$ may be concatenated. It may further be understood that the incremental index is not restricted to being regular and could in fact be random. For instance a tripling of
5 sequence length may be chosen by the concatenation of short sequences n , $n+y$, $n+z$ where z is not necessarily equal to a multiple of y .

As described above, the spreading sequence extension
10 scheme requires two mechanisms in order to operate:

1. A set of existing short spreading sequences.
2. An algorithm for selecting a number of the short spreading sequences from the set, in order that they may be concatenated to form a longer
15 spreading sequence.

As will be appreciated, the sequence extension scheme may be utilised in the UE and/or Node B in order to generate sequences that may be used for amongst other purposes to
20 spread data with the generated codes, or scramble data with the generated codes or used as extended channel estimation sequences.

As a more specific example of the method, but not
25 restricted to this case, the length of scrambling sequences specified in the UTRA high chip rate TDD mode may be extended. Such an extension could be applied to the specified chip rate or may be required for instance if the TDD mode were to be operated at a multiple of the
30 chip rate in the current specification. Extending the length of the scrambling codes in this scenario improves

02.098-ipw

- 11 -

the correlation properties and hence aids in the detection of the wanted signals. Whilst the scrambling code length has been extended by concatenation, it will remain short relative to the length of the burst and also remain periodic (albeit over a potentially larger number of symbols). This means that receiver algorithms such as adaptive filters and reduced complexity multi-user detectors that rely on these properties will be able to operate.

10

In FIG. 3 a spreading arrangement 300 in accordance with a preferred embodiment of the present invention is shown. In the arrangement 300 a scrambling code selection algorithm 310 receives input parameters such as initial cell parameter assignment, SFN, etc. The scrambling code selection algorithm 310 selects scrambling codes from a set of existing short sequences 320. The selected scrambling codes are concatenated in concatenator 330 and the resultant concatenated sequence is applied to multiplier 340, to which an input chip sequence is also applied, to produce a scrambled chip sequence. It will be appreciated that the concatenator 330 may function simply to sequentially apply each of the selected sequences.

25

In the current standardisation of 3GPP TDD the scrambling code selection algorithm remains constant over the duration of the burst, i.e., every 16 chips in a burst the same scrambling code is selected. In this preferred embodiment of the invention the period of this algorithm is increased to a multiple of 16 chips, i.e., 1, 2, 3, 4,

30

02.098-ipw

- 12 -

etc. Thus, if the initial scrambling code selection is n an algorithm may be used with a period 4 which selects the scrambling codes of length 16 chips as follows during the course of the burst:

5 $(n, n+1, n+2, n+3, n, n+1, n+2, n+3, n, n+1, n+2, n+3, \dots)$

However as mentioned above, the algorithm is not restricted to incrementing the scrambling code index by 1 each time, for instance another embodiment of the
10 invention would be to select the length 16 chip scrambling codes as follows during the course of the burst:

$(n, n+2, n+4, n+6, n, n+2, n+4, n+6, n, n+2, n+4, n+6, \dots)$

Thus an important feature of this embodiment is the
15 extension of the scrambling code duration via the concatenation of the existing scrambling codes of length 16 chips. Alternatively, this can be viewed as extending the period of the scrambling code selection algorithm in FIG. 3.

20

The scrambling code selection algorithm as illustrated in FIG. 3 can be driven by a number of input parameters. These parameters could include some or all of the following, but should not be restricted to this list:

- 25 1. Initial cell parameter assignment
 2. System frame number (SFN)
 3. Chip rate of transmission
 4. Length of extended spreading and or scrambling sequence
30 5. A User Equipment (UE) identifier
 6. Channelisation code employed.

02.098-ipw

- 13 -

- It will be appreciated that the method of producing a sequence described above may be carried out in software running on a processor (not shown) in a base station (Node B) or UE, and that the software may be provided as a computer program element carried on any suitable data carrier (also not shown) such as a magnetic or optical computer disc.
- 10 It will be also be appreciated that the method of producing a sequence described above may alternatively be carried out in hardware, for example in the form of an integrated circuit (not shown) such as an FPGA (Field Programmable Gate Array) or ASIC (Application Specific
- 15 Integrated Circuit) in the Node B or UE.

It will further be understood that the efficient CDMA sequence construction scheme described above may be applied to any sequence, such as a spreading sequence, a scrambling sequence or a channel estimation or training sequence (e.g., a midamble).

20

Referring now also to FIG. 4, a second preferred embodiment of the present invention relates to the concatenation of training sequences for the purpose of channel estimation. As shown in FIG. 4, a training sequence X 410 of length M is concatenated with another training sequence Y 420 of length N to form a new training sequence Z 430 of length $M+N$. It will of course be appreciated that training sequence X may be the

25

30

02.098-ipw

- 14 -

same as training sequence Y and that the concatenation is not restricted to two existing training sequences but rather any positive integer number of channel estimation or training sequences.

5

Training sequences may be concatenated to produce longer or extended training sequences resulting in an improved carrier to interference (C/I) ratio (where interference is taken as including interference and background noise)

10 at the output of the channel estimator. Obviously the benefits of using existing shorter training sequences and concatenating them to form longer ones still apply in terms of simplicity of design and reuse of existing hardware, software, ROM etc.

15

It will be understood that the method is not restricted to the concatenation of two training sequences but rather any number of training sequences. Furthermore it will be understood that the some or all of the training sequences
20 used for concatenation may be the same as each other. In the case where the training sequences are identical soft combining on the output of the channel estimator is performed in order to realise the additional gain in C/I.

25

A further point to note is that the entire length of the existing training sequences may not necessarily be used in the concatenation process. For instance, if the training sequence comprises a base sequence which is periodically extended, the base sequences may be used as
30 the existing training sequences for concatenation.

02.098-ipw

- 15 -

It will be understood that the efficient CDMA sequence construction scheme described above provides the following advantages:

- allows extension of sequences without performing an exhaustive search for sequences with optimal desired properties.
- provides a simple means of extending the sequence duration that is able to re-use the existing hardware/software/ROM, etc., and only requires the addition of a simple programmable or fixed selection algorithm.
- extends the sequence duration to improve the detection of wanted signals via the use of a conventional matched filter, a multi-user detector or an adaptive filter/equaliser.

02.098-ipw

- 16 -

Claims

1. An arrangement for producing a sequence of a predetermined length in a spread spectrum communication system, the arrangement comprising:
 - a plurality of predetermined sequences having lengths less than the predetermined length;
 - means for selecting at least two of the plurality of predetermined sequences; and
 - means for concatenating the selected at least two of the plurality of predetermined sequences to produce the predetermined length sequence.
2. The arrangement of claim 1 wherein
 - the plurality of predetermined sequences are arranged in an indexed list; and
 - the means for selecting comprises:
 - means for selecting a first sequence of the at least two of the plurality of predetermined sequences with an index value of n from the list; and
 - means for selecting each successive sequence of the at least two of the plurality of predetermined sequences with an index value incremented from that of the previously selected sequence from the list.
3. The arrangement of claim 2 wherein the increment is a predetermined integer.

02.098-ipw

- 17 -

4. The arrangement of claim 3 wherein the predetermined integer is one of: 0, 1 and 2.

5. The arrangement of claim 2 wherein the increment is
5 randomly chosen for each successive sequence.

6. The arrangement of any one of claims 2-5 wherein n is determined from at least one of A-F:

- A initial cell parameter assignment,
- 10 B system frame number (SFN),
- C chip rate of transmission,
- D predetermined length of spreading code,
- E identifier of intended receiver of data spread
with the predetermined length spreading code,
- 15 F channelisation code employed.

7. The arrangement of any one of claims 1-6 wherein the plurality of predetermined sequences have a length of 16
20 chips.

8. The arrangement of any one of claims 1-7 wherein the spread spectrum communication system comprises a DS-CDMA
UMTS system.

25 9. The arrangement of claim 8 wherein the system comprises a UTRA TDD system.

10. The arrangement of any one of claims 1-8 wherein the sequence is one of:

- 30 a spreading sequence,
- a scrambling sequence and

02.098-ipw

- 18 -

a midamble.

11. The arrangement of any one of claims 1-9 further comprising:

5 means for processing data with the predetermined length sequence.

02.098-ipw

- 19 -

12. A method of producing a sequence of a predetermined length in a spread spectrum communication system, the method comprising:

5 providing a plurality of predetermined sequences having lengths less than the predetermined length;

selecting at least two of the plurality of predetermined sequences;

10 concatenating the selected at least two of the plurality of predetermined sequences to produce the predetermined length sequence.

13. The method of claim 12 wherein

15 the step of providing comprises providing the plurality of predetermined sequences in an indexed list; and

the step of selecting comprises:

20 selecting a first sequence of the at least two of the plurality of predetermined sequences with an index value of n from the list; and

25 selecting each successive sequence of the at least two of the plurality of predetermined sequences with an index value incremented from that of the previously selected sequence from the list.

14. The method of claim 13 wherein the increment is a predetermined integer.

30 15. The method of claim 14 wherein the increment is one of: 0, 1 and 2.

02.098-ipw

- 20 -

16. The method of claim 13 wherein the increment is randomly chosen for each successive sequence.

5 17. The method of any one of claims 12-16 wherein n is determined from at least one of A-F:

- A initial cell parameter assignment,
- B system frame number (SFN),
- C chip rate of transmission,
- 10 D predetermined length of spreading code,
- E identifier of intended receiver of data spread with the predetermined length spreading code,
- F channelisation code employed.

15 18. The method of any one of claims 12-17 wherein the plurality of predetermined sequences have a length of 16 chips.

19. The method of any one of claims 11-17 wherein the
20 spread spectrum communication system comprises a DS-SS-CDMA UMTS system.

20. The method of claim 19 wherein the UMTS system comprises a UTRA TDD system.

25

21. The method of any one of claims 12-20 further comprising:

processing data with the predetermined length
sequence.

30

02.098-ipw

- 21 -

22. A base station for use in a CDMA system, the base station comprising the arrangement of any one of claims 1-11.

5 23. User equipment for use in a CDMA system, the user equipment comprising the arrangement of any one of claims 1-11.

10 23. A computer program element comprising computer program means for performing substantially the method of any one of claims 12-21.

24. An integrated circuit comprising substantially the arrangement of any one of claims 1-11.

15 25. An arrangement, for producing a sequence of a predetermined length in a code division multiple access (CDMA) system, substantially as hereinbefore described with reference to the accompanying drawings.

20 26. A method, of producing a sequence of a predetermined length in a code division multiple access (CDMA) system, substantially as hereinbefore described with reference to the accompanying drawings.

02.098-ipw

- 22 -

Abstract**ARRANGEMENT AND METHOD FOR SEQUENCE PRODUCTION IN A
SPREAD SPECTRUM COMMUNICATION SYSTEM**

5

An efficient scheme (300) for CDMA coding constructs codes by generating longer code sequences via concatenation (330) from an existing set (320) of short sequences. The sequences may be spreading, scrambling and or training or channel estimation (such as midamble) sequences.

10

This provides the following advantages:

15

- allows extension of sequences without performing an exhaustive search for sequences with optimal desired properties.
- provides a simple means of extending the sequence duration that is able to re-use the existing hardware/software/ROM, etc., and only requires the addition of a simple programmable or fixed selection algorithm.
- extends the sequence duration to improve the detection of wanted signals via the use of a conventional matched filter, a multi-user detector or an adaptive filter/equaliser.

20

02.098-1pw

1/4

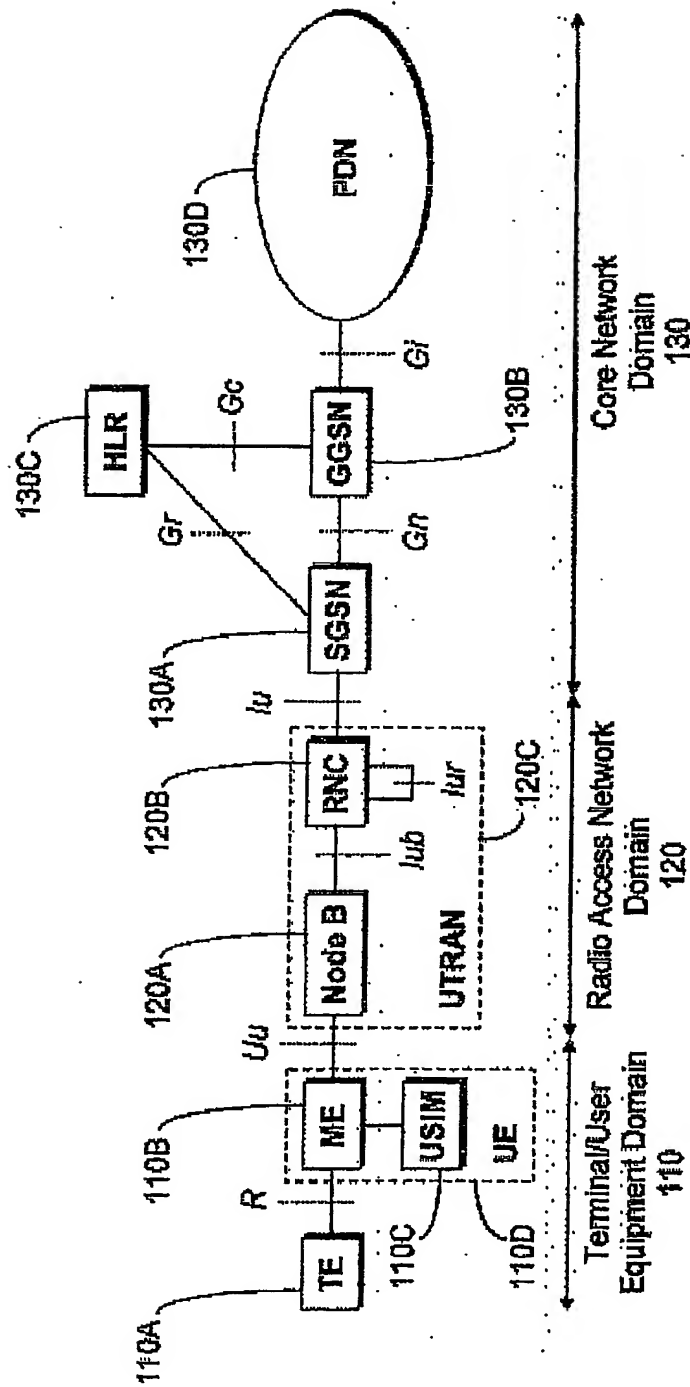


FIG. 1

02.098-ipw

2/4

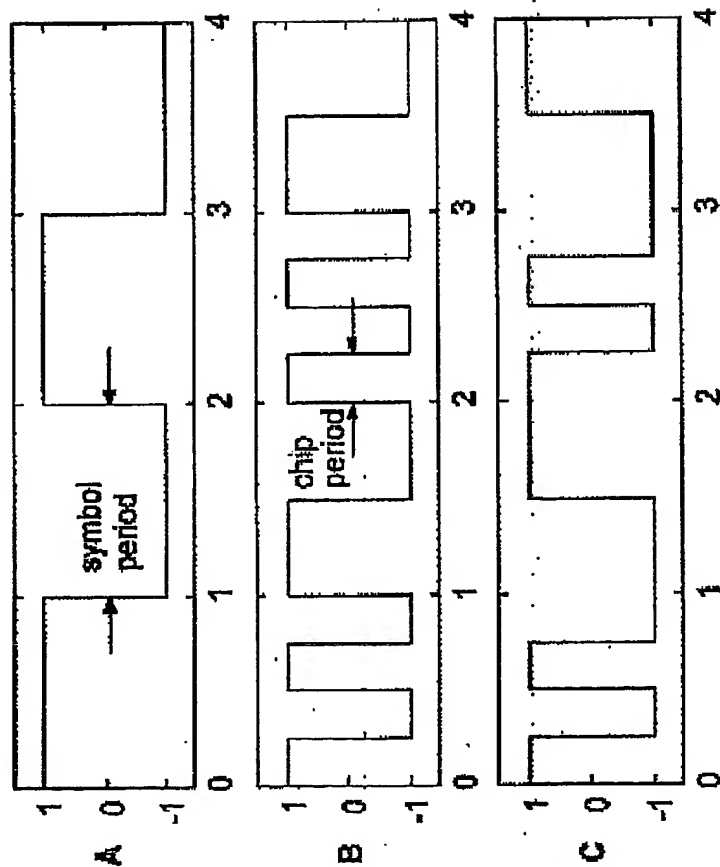


FIG. 2

02.098-ipw

3/4.


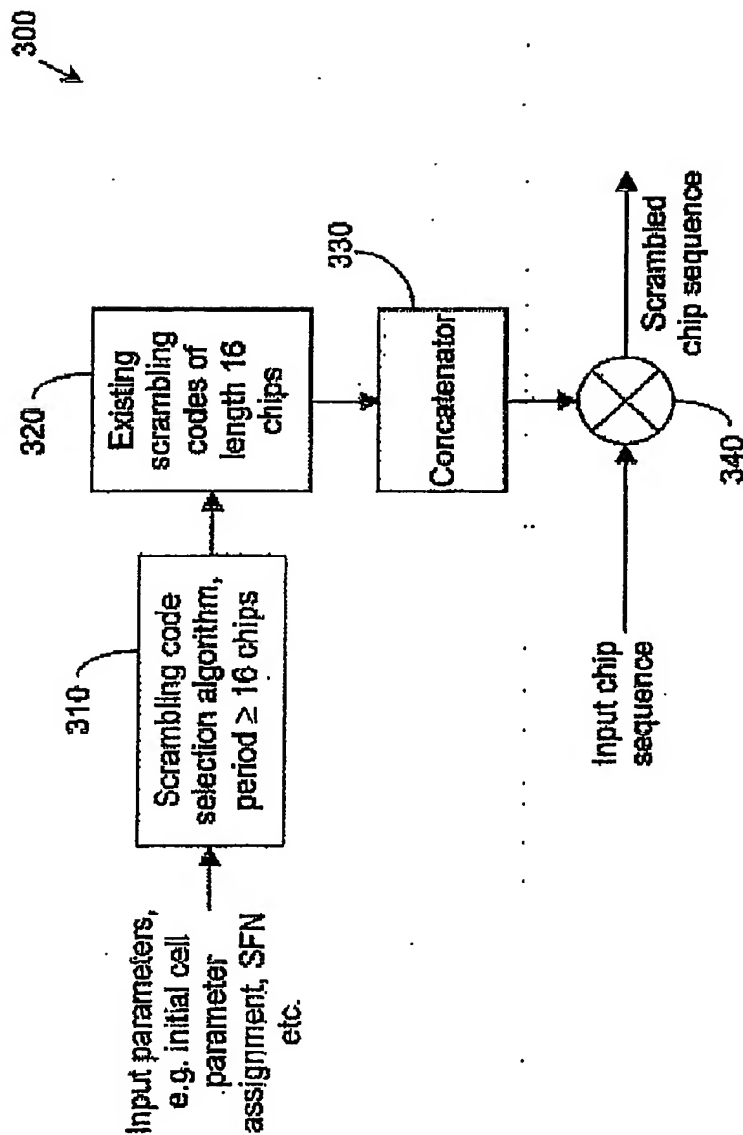


FIG. 3

02.098-ipw

4/4

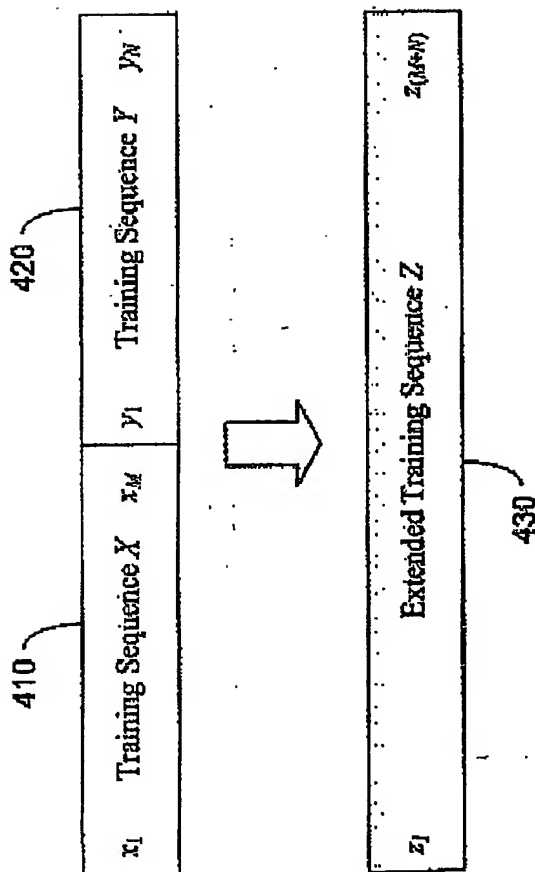

PCT/GB03/004737.

Inetli

3/11/03.



PCT Application

GB0304737



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.